

VSCO₂ & N₂O

VERTICAL BULK STORAGE SYSTEMS


Our VSCO₂ & N₂O Series of Bulk Carbon Dioxide and Nitrous Oxide Storage Tanks are engineered for the efficient storage supply of carbon dioxide and nitrous oxide. For maximum lifetime thermal efficiency, the VSCO₂ and N₂O systems are manufactured with an all-welded outer container to contain our proprietary Composite Super Insulation™ system and superior vacuum technology.

VACUUM-JACKETED COMPOSITE vs. FOAM INSULATION

- An ultra-low heat leak – eliminating the need for a costly refrigeration system in most applications.
- No costly down time to refurbish water-soaked or deteriorated foam insulation.
- Lowest lifecycle costs for bulk CO₂ & N₂O storage
- Hold time is 8 times longer than new foam designs

PRODUCT HIGHLIGHTS

- Stainless steel inner vessel and piping eliminates dry ice safety concerns & complies with food grade standards
- Inner vessel designed and built to ASME Section VIII, Div. 1 pressure vessel code
- Oxygen cleaned inner vessel and piping per CGA S4.1
- Internal top head cleaning baffle for internal cleaning with external system eliminates need for manway
- CGA fill and return fittings with drain valves standard on all models
- Analog & digital (telemetry ready) liquid level gauges available with flexible stainless steel connecting lines
- Pressure builder and vaporizer systems available – see applications brochure P/N 21111520 for details
- Backed by a five-year vacuum warranty
- Optional internal vapor condensing coil available – see applications brochure P/N 21111520 for details
- Optional refrigeration system for condensing coil available
- Long-life urethane paint system

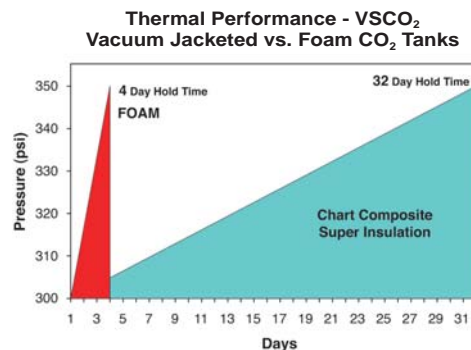


VSCO₂ & N₂O

VERTICAL BULK STORAGE SYSTEMS

Model	CO ₂				N ₂ O				MAWP*		Diameter		Height		Weight**		NER %/day in CO ₂ /N ₂ O
	Gross Cap. Ton	Net Cap. Tonne	Gross Cap. Ton	Net Cap. Tonne	Gross Cap. Ton	Net Cap. Tonne	Gross Cap. Ton	Net Cap. Tonne	psig	bar	in	mm	in	mm	lbs	Kg	
6 Ton	6.9	6.3	6.6	6.0	6.6	6.0	6.3	5.7	350	24.1	66	1,727	196	4,969	7,400	3,357	.15
14 Ton	13.2	12.0	12.6	11.4	12.9	11.7	12.3	11.2	350	24.1	86	2,184	228	5,791	13,700	6,214	.08
30 Ton	30.7	27.8	29.1	26.4	29.3	26.6	27.9	25.3	350	24.1	114	2,900	291	7,391	31,700	14,379	.05
50 Ton	47.7	43.3	45.4	41.1	45.6	41.4	43.4	39.3	350	24.1	114	2,900	406	10,312	44,300	20,094	.04

* MAWP - Maximum Allowable Working Pressure. ** Weights are for ASME design. (NER) = Nominal Evaporation Rate

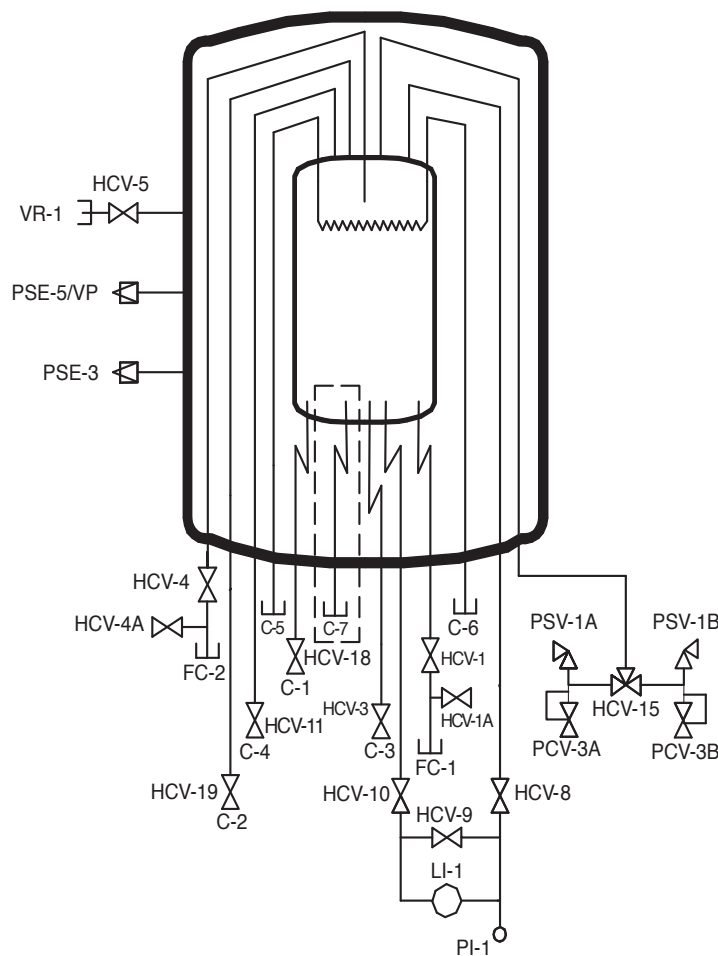

Nomenclature

C-1	Connection, Auxiliary Liquid
C-2	Connection, Auxiliary Vapor
C-3	Connection, PB Liquid
C-4	Connection, PB Vapor
FC-1	Connection, Fill
FC-2	Connection, Vapor Return/Full Trycock
HCV-1	Valve, Bottom Fill
HCV-1A	Valve, Drain
HCV-3	Valve, PB Liquid
HCV-4	Valve, Vapor Return/Full Trycock
HCV-4A	Valve, Drain
HCV-5	Valve, Vacuum Gauge Tube
HCV-8	Valve, LI-1 Vapor Phase
HCV-9	Valve, LI-1 Equalization
HCV-10	Valve, LI-1 Liquid Phase
HCV-11	Valve, PB Vapor
HCV-15	Valve, Safety Relief Selector
HCV-18	Valve, Auxiliary Liquid
HCV-19	Valve, Auxiliary Vapor
LI-1	Level Indicator, Inner Vessel
PI-1	Pressure Indicator, Inner Vessel
PCV-3A	Pressure Control Valve, Econ Vent
PCV-3B	Pressure Control Valve, Econ Vent
PSE-3	Pressure Safety Element, Outer Vessel
PSE-5/VP	Pressure Safety Element, Otr Ves., Vac Port
PSV-1A	Pressure Safety Valve, Inner Vessel
PSV-1B	Pressure Safety Valve, Inner Vessel
VR-1	Vacuum Readout, Outer Vessel

Refrigeration Option

C-5	Connection, Auxiliary Refrigeration
C-6	Connection, Auxiliary Refrigeration

*Dashed Line Represents Additional Line
(Standard on 30/50 Ton Only)*

C-7	Connection, Secondary Auxiliary Liquid
-----	--

Auxiliary refrigeration valves on HCV-1A and HCV-4A not included in C-5 and C-6 optional N₂O service.

Chart Inc.
U.S.: 1-800-400-4683
Worldwide: 1-952-758-4484



©2018 Chart Inc.
P/N 10813996
www.chartindustries.com