

# ANALOX AX60 CO<sub>2</sub> DETECTOR

ENSURING A SAFE WORKING ENVIRONMENT

## McDonald's CO<sub>2</sub> Monitoring Systems




The Analox CO<sub>2</sub> Monitoring System is a precision instrument that provides continuous, accurate monitoring of CO<sub>2</sub> levels to ensure a safe working environment for your employees, suppliers and yourself. A proven system with over 80,000 units installed worldwide. The AX60 is comprised of one central unit (with visual and audible alarms) to be mounted in the area where CO<sub>2</sub> is stored and one alarm repeater for remote mounting.

The AX60 is designed for sites needing multiple placements of alarm and sensor units which are connected to a central display. Each alarm unit not only has an audible sounder but also utilizes a high-intensity LED strobe light – perfect for warning of danger in noisy environments.



### AX60 Product Advantages

- Same CO<sub>2</sub> detector as A50, but modular
- One central unit, up to 4 CO<sub>2</sub> sensors and 8 strobe repeaters (max. of 4/sensor) for monitoring in remote areas
- 5 year system warranty
- Accessories such as sensor protective guard, sensor splash guard, manager's office beacon & junction box mounting

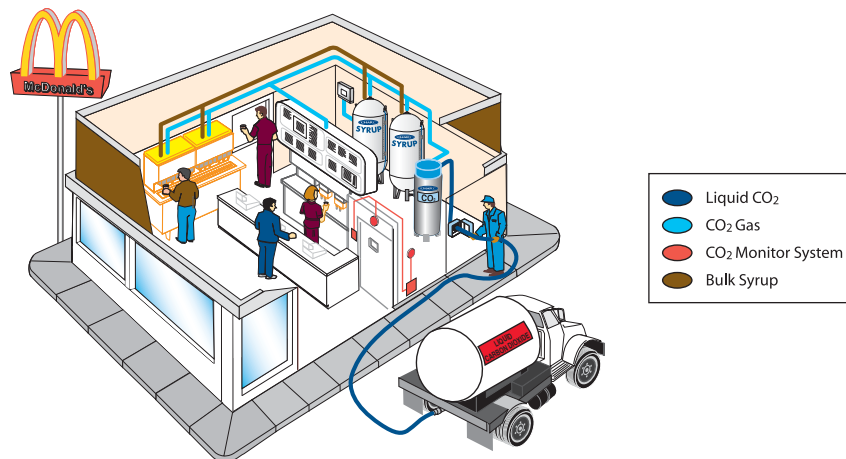


# CARBO-MAX<sup>®</sup> 1000 HIGH FLOW

## HIGH CAPACITY – HIGH FLOW MCDONALD'S BULK CO<sub>2</sub> TANKS

### Product Advantages:

- Internal vaporization coils with continuous flow rates up to 30 lbs/hr
- Internal pressure build coil
- 1000 lbs of CO<sub>2</sub> storage capacity
- Standard tank includes Sure-Fill™ system
- 30" diameter x 72" height allows tank to fit through standard doorways
- Differential Pressure liquid level gauge
- Optional Bases Available:
  - Painted Steel Base
  - Pallet Jack Compatible Base
  - Stainless Steel 6" Legs

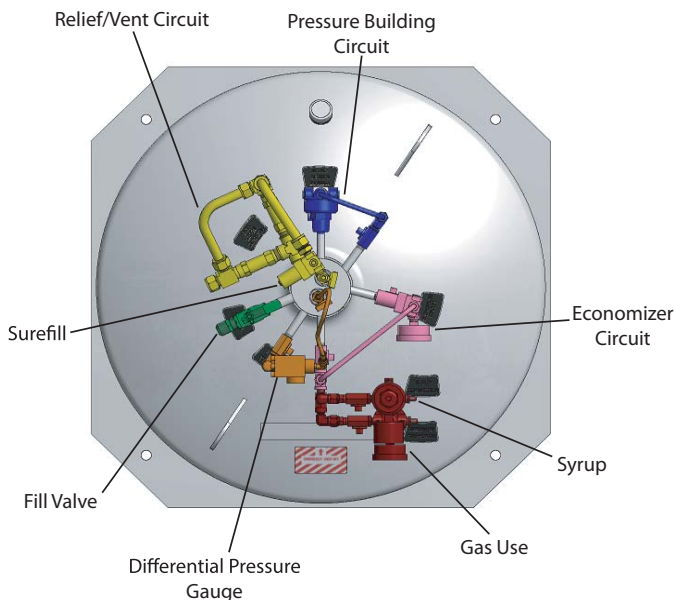

### SPECIFICATIONS

#### DIMENSIONS

Diameter	30 in	76.2 cm
Height	72.5 in	184.2 cm
Empty Weight	788 lb	357.4 kg
Full Weight	1788 lb	811.0 kg

#### DESIGN CRITERIA

Code	ASME*	
MAWP	300 psig	20.7 bar
Insulation Type	SI †	

#### CAPACITY

Gross Volume	89.1 gal	337.4 ltr
Net Storage Volume	118 gal	446.6 ltr
Storage Capacity at 125 psig	1000 lb	453.6 kg

#### PERFORMANCE

Evaporation Rate §	3.0 lb/day	1.4 kg/day
CO <sub>2</sub> Gas Delivery (Continuous) <sup>®</sup>	30.0 lb/hr	13.6 kg/hr
Peak flow rate <sup>®</sup>	50.0 lb/hr	22.7 kg/hr

#### COMPONENTS

ASME Relief Valve Setting	300 psig	20.7 bar
Secondary RV Setting	450 psig	31.0 bar
Sure-Fill RV Setting	200 psig	13.8 bar
Gas Use Connection	1/4 in 45° Flare	
Fill Line Connection	5/8 in Male 45° Flare	
Vent Connection	1/2 in OD Tubing	

#### CONSTRUCTION

Inner Vessel Material	Stainless Steel
Outer Vessel Material	Stainless Steel
Vaporizer Coil	Stainless Steel
Liquid Level Gauge <sup>°</sup>	Differential Pressure

\* ASME Boiler and Pressure Vessel Design Section VIII, Div. I

† Super Insulation/High Vacuum

§ No loss in normal applications

<sup>®</sup> 12 consecutive hours at room temperature

<sup>°</sup> Float gauge available upon request

### Your Local Representative



©2018 Chart Inc.

Chart Inc.  
 U.S.: 1-800-400-4683  
 Worldwide: 1-952-758-4484  
[www.chartbeverage.com](http://www.chartbeverage.com)  
 Order Parts: [www.chartparts.com](http://www.chartparts.com)

P/N 20883995