

# CARBO-MIZER® 300


HIGH CAPACITY BULK CO<sub>2</sub>



## Bulk CO<sub>2</sub> Systems



• FAST FOOD • CONVENIENCE STORES • RESTAURANTS • BARS

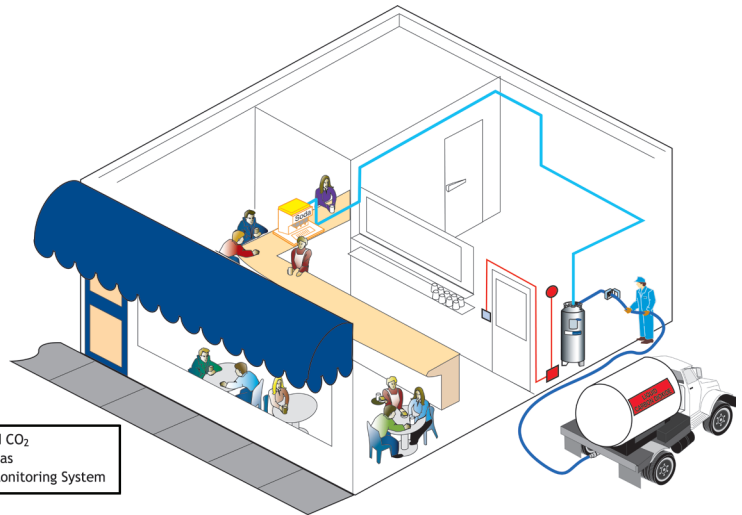

### Carbo-Mizer® 300

The Carbo-Mizer 300 bulk CO<sub>2</sub> system is an affordable alternative to high-pressure cylinders. This system is designed to meet the requirements of operations using less than 299 lb (135.6 kg) of CO<sub>2</sub> per month.

Each Chart Carbo Series vessel is equipped with a proprietary vacuum maintenance system to ensure optimized long-term performance. Unique to the market, this feature offers greater efficiency over longer periods of time.




# CARBO-MIZER® 300

HIGH CAPACITY BULK CO<sub>2</sub>


## Product Advantages:

- Stainless steel, double-walled, vacuum-insulated container
- Proprietary vacuum regeneration system for on-site maintenance
- Safe, low operating pressure
- Easy-to-read gauges for contents and tank pressure
- Efficient gas withdrawal system supplies CO<sub>2</sub> gas in excess of 3 lb/hr (1.4 kg)
- Fully automated system requiring no electricity
- Optional 6" (15.2 cm) welding uni-body legs

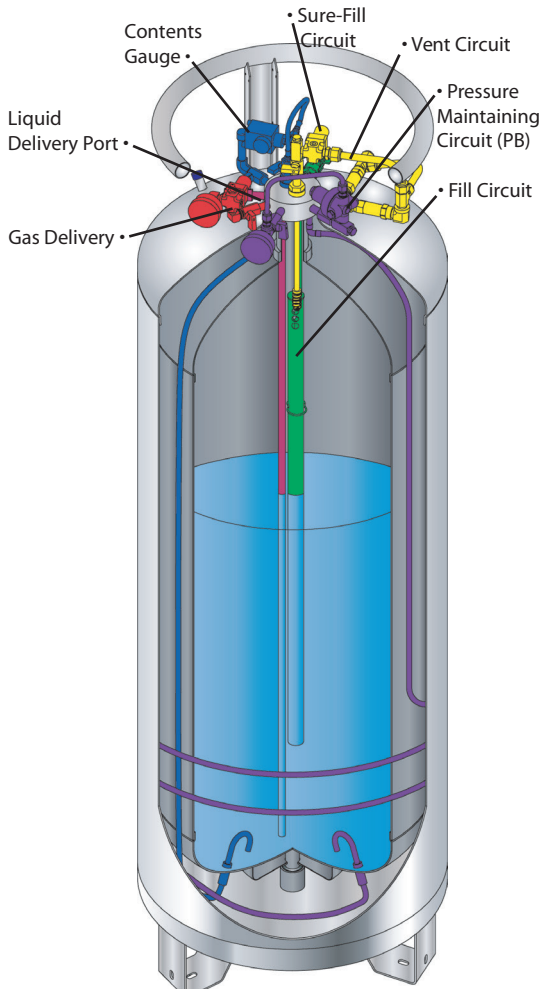

- Height without legs, subtract 6 in.
- \* ASME Boiler and Pressure Vessel Design Section VIII, Div. 1
- † Super Insulation/High Vacuum
- § No loss in normal applications
- © 12 consecutive hours at room temperature
- ‡ Four consecutive hours at room temperature
- ° Float gauge available upon request
- ★ Meets NSF International Standards

## Specifications

DIMENSIONS		
Diameter	20 in	50.8 cm
Height (with legs) ▫	55.625 in	141.28 cm
Empty Weight	216 lb	98 kg
Full Weight	515 lb	233.6 kg
DESIGN CRITERIA		
Code	ASME*	
MAWP	300 psig	20.7 bar
Insulation Type	SI †	
Certifications ★		
CAPACITY		
Gross Volume	34.3 gal	129.8 ltr
Net Storage Volume	32 gal	121 ltr
Storage Capacity at 125 psig	299 lb	135.6 kg
PERFORMANCE		
Evaporation Rate §	2.0 lb/day	0.91 kg/day
CO <sub>2</sub> Gas Delivery (Continuous)®	1.0 lb/hr	0.5 kg/hr
Peak flow rate‡	3.0 lb/hr	1.4 kg/hr
COMPONENTS		
ASME Relief Valve Setting	300 psig	20.7 bar
Secondary RV Setting	450 psig	31.0 bar
Gas Use Connection	1/4 in 45° Flare	
Fill Line Connection	5/8 in Male 45° Flare	
Vent Connection	1/2 in OD Tubing	
CONSTRUCTION		
Inner Vessel Material	Stainless Steel	
Outer Vessel Material	Stainless Steel	
Liquid Level Gauge°	Differential Pressure	

## Your Local Representative



Chart Inc.  
 U.S.: 1-800-247-4446  
 Worldwide: 1-952-243-8800  
 chartbeverage.com • chartparts.com