

AD26 MANGANESE DIOXIDE MEDIA

For Arsenic, Iron, Manganese, and Sulfide Removal

MEDIA SPECIFICATIONS



Removal Mechanisms	Rapid Oxidation Adsorption Autocatalytic Adsorption
Removal Efficiency	> 95%
H2S Capacity	250 - 300 gr/ft ³
Size	20 x 40 mesh
Color	Black
Physical Form	Granular Particulate
Moisture Content	< 0.5%
Bulk Density	120 lbs/ft ³
Uniformity Coefficient	< 1.45
MnO ₂ Content	70 - 80%
Certifications	NSF 61



Example of the AD26 Manganese Dioxide media

OPERATING CONDITIONS

Treatment Goals	Iron: < 0.3 mg/L Manganese: < 0.05 mg/L Arsenic: < 0.010 mg/L
pH Range	6.5 - 9.0
Temperature	Groundwater ambient (55 - 75 F)
Service Flow Rate	8 - 12 gpm/ft ²
Contact Time	1.5 - 3 minutes at Fe < 5 mg/L
Bed Depth	30 - 36 inches
Bed Expansion	20 - 30% (on average)
Media Life	> 10 years (on average)
Pre-Oxidant	Hypochlorite Feed (12.5% average)
Oxidant Contact Time	15 - 30 Seconds
Backwash Flow Rate	18 - 20 gpm/ft ²
Backwash Frequency	1 - 3 times/weekly (site specific)
Pressure Drop	4 psig at 9 gpm/ft ²

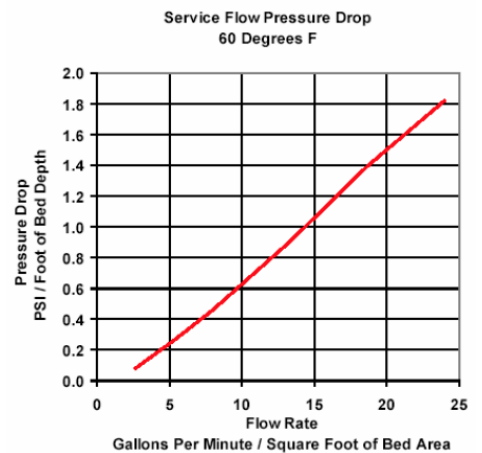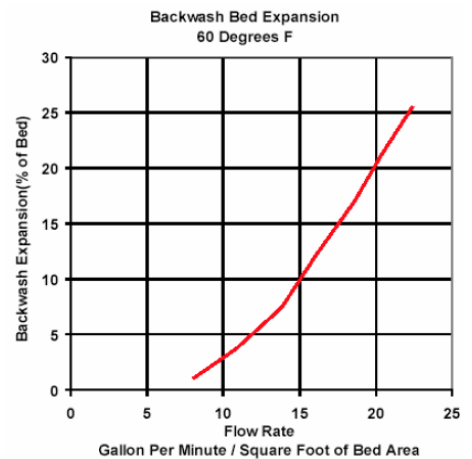

AD26L MANGANESE DIOXIDE MEDIA

For Arsenic, Iron, Manganese, and Sulfide Removal

MEDIA SPECIFICATIONS

Removal Mechanisms	Rapid Oxidation Adsorption Autocatalytic Adsorption
Removal Efficiency	> 95%
H2S Capacity	250 - 300 gr/ft ³
Size	20 x 40 mesh
Color	Black
Physical Form	Granular Particulate
Moisture Content	< 0.5%
Bulk Density	95 lbs/ft ³
MnO2 Content	15%
Certifications	NSF 61



Example of the AD26L Manganese Dioxide media

OPERATING CONDITIONS

Treatment Goals	Iron: < 0.3 mg/L Manganese: < 0.05 mg/L Arsenic: < 0.010 mg/L
pH Range	6.5 - 9.0
Temperature	Groundwater ambient (55 - 75 F)
Service Flow Rate	8 - 12 gpm/ft ²
Contact Time	1.5 - 3 minutes at Fe < 5 mg/L
Bed Depth	30 - 36 inches
Bed Expansion	20 - 30% (on average)
Media Life	> 10 years (on average)
Pre-Oxidant	Hypochlorite Feed (12.5% average)
Oxidant Contact Time	15 - 30 Seconds
Backwash Flow Rate	18 - 20 gpm/ft ²
Backwash Frequency	1 - 3 times/weekly (site specific)
Pressure Drop	4 psig at 9 gpm/ft ²

